

# fitlet2 FC-USB installation instructions

## Package Content

2x retaining Washer




2x 6mm Phillips screw




1x 3pin power cable



1x FC-USB

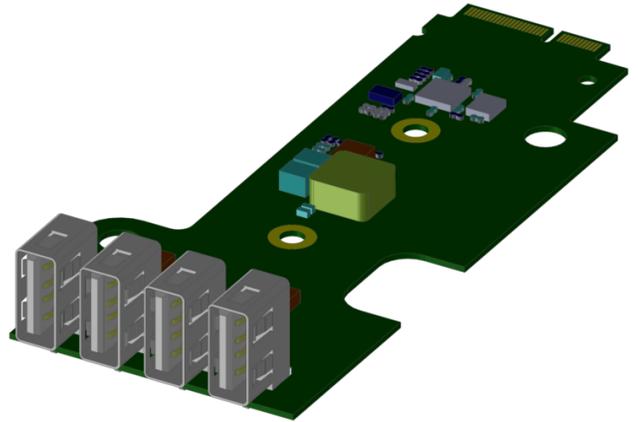



1x side panel

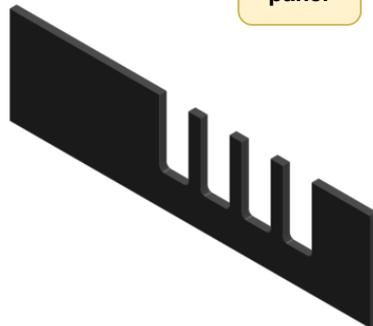

1

Plug the 3pin power cable to the back of the FC-USB in the J1 port

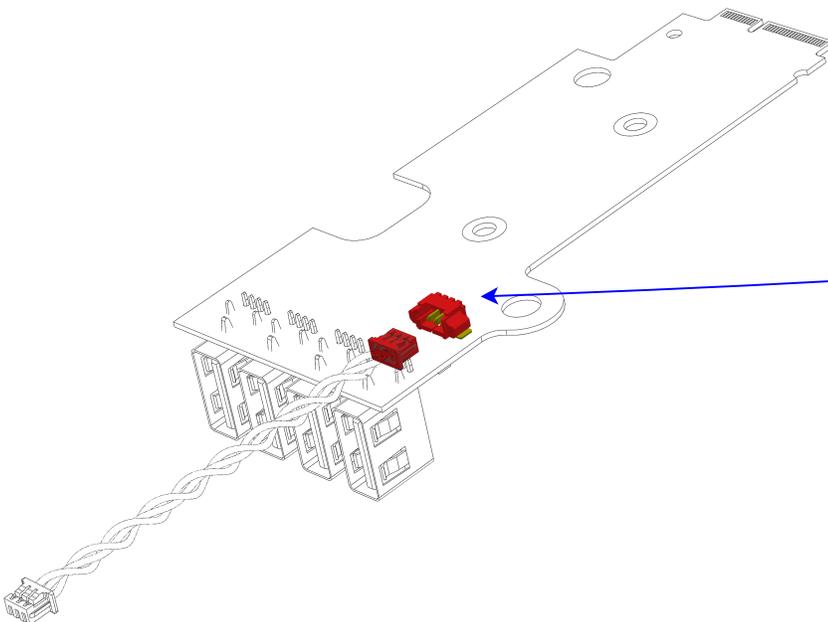


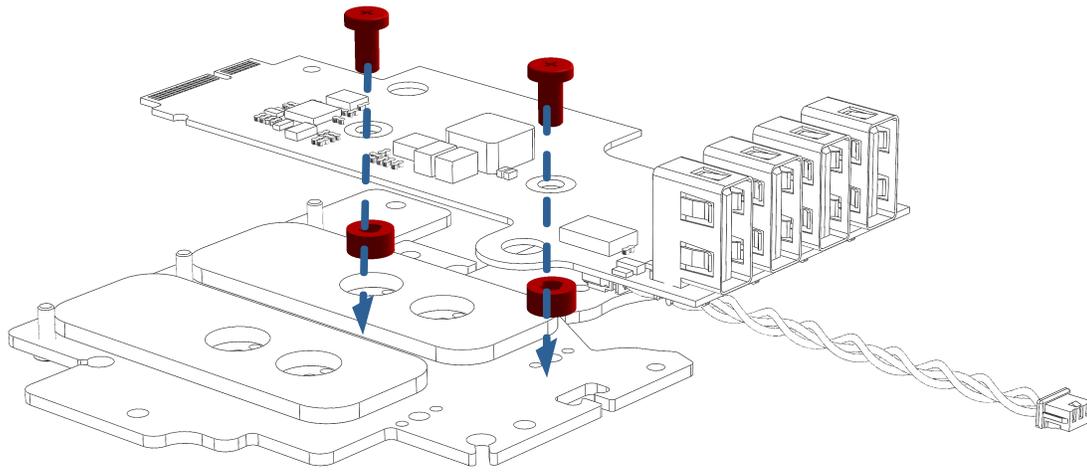

2 Place the retaining washers at the designated location on the cooling plate and seat the FC-USB on-top of them. Then fasten the 2x Phillips screws



The cooling plate should be supplied with the product's packaging or already assembled.

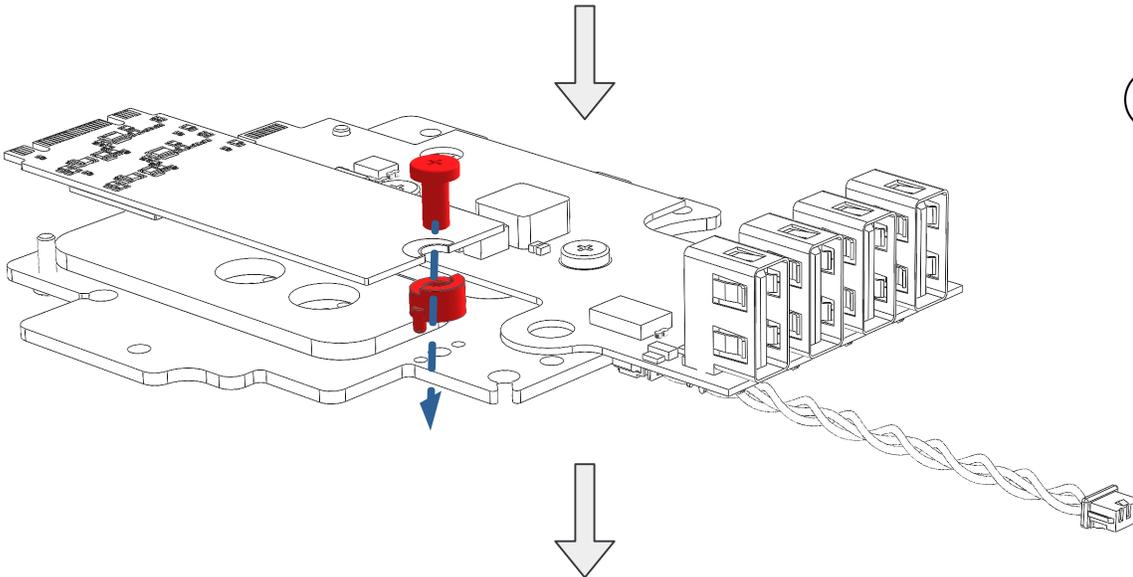


3

Place the red module spacer in the designated location then place the M.2 storage component side facing downward to the thermal pad. Then fasten using the 1x Phillips screw



The red module spacer should be supplied with the product's packaging or already assembled

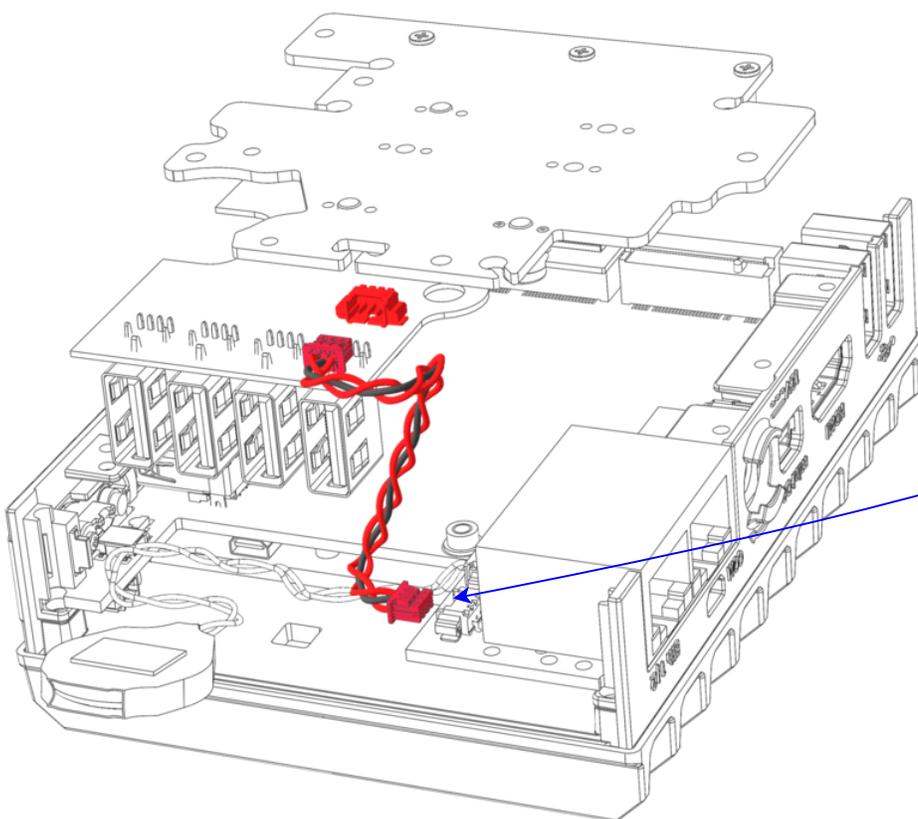


4

Plug the 3pin power cable to the J11 port

5

Assemble the cooling plate with the components installed as a whole unit to the M.2 connectors

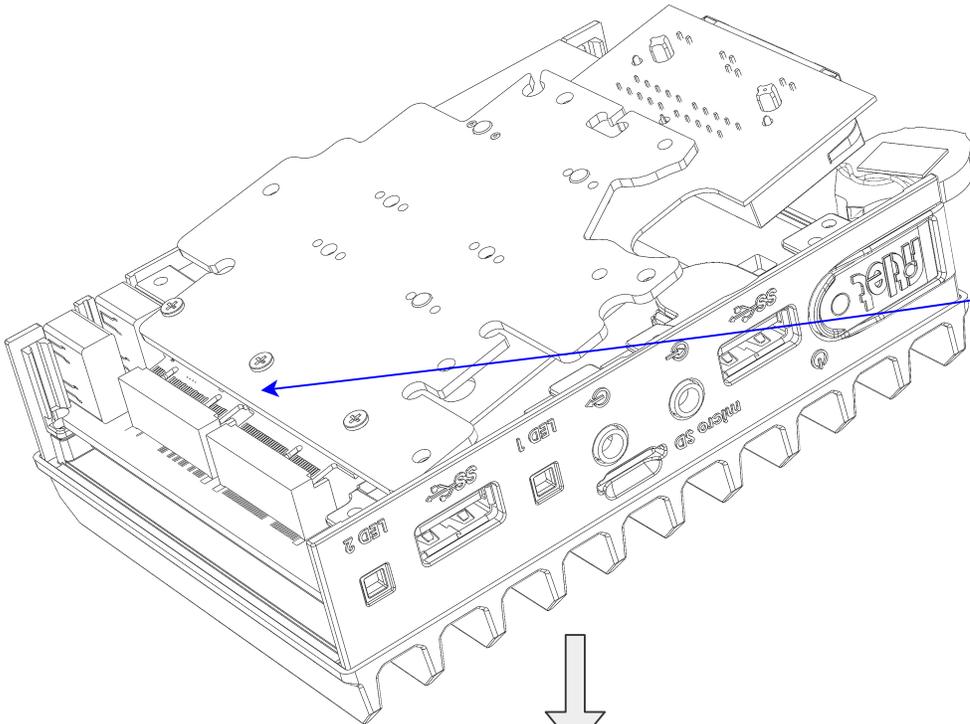


6

Fasten the cooling plate in place assembling the 3x Phillips screws.




The 3x Phillips screws supplied with the product's packaging or already assembled.

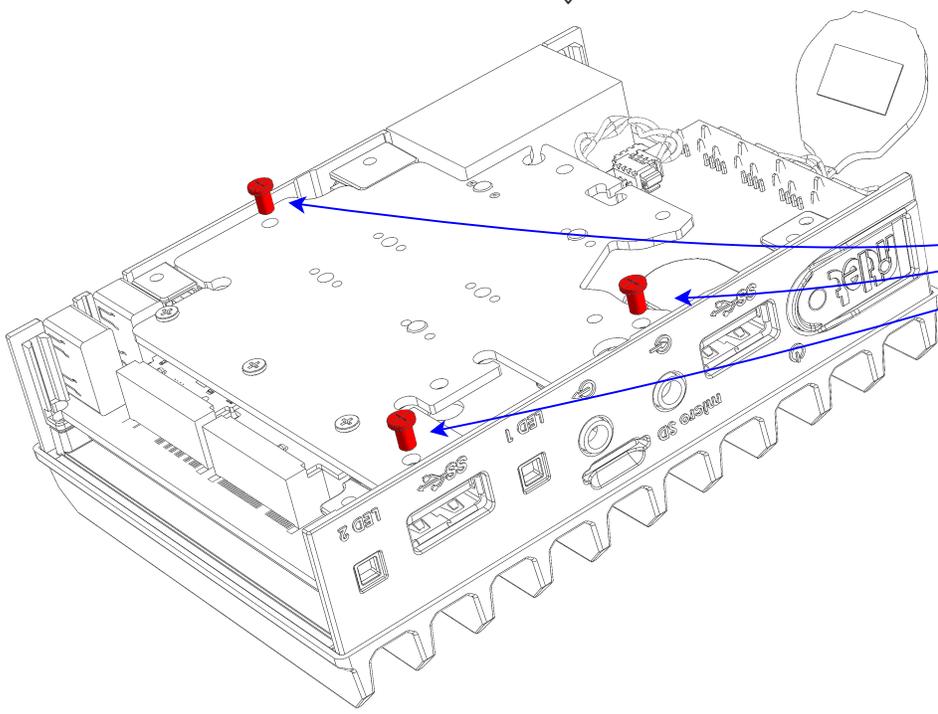


7

Stick the RTC battery in its place

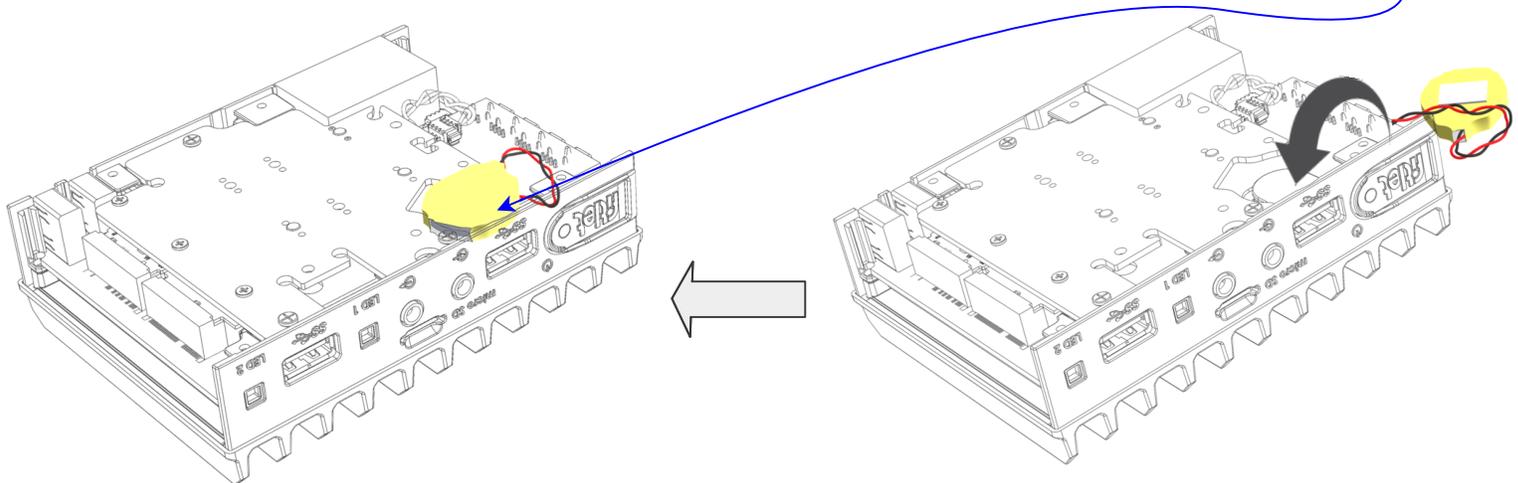

8 Before placing the bottom cover, make sure the Kensington lock mechanism is oriented to align with the side panel that has the Kensington lock hole

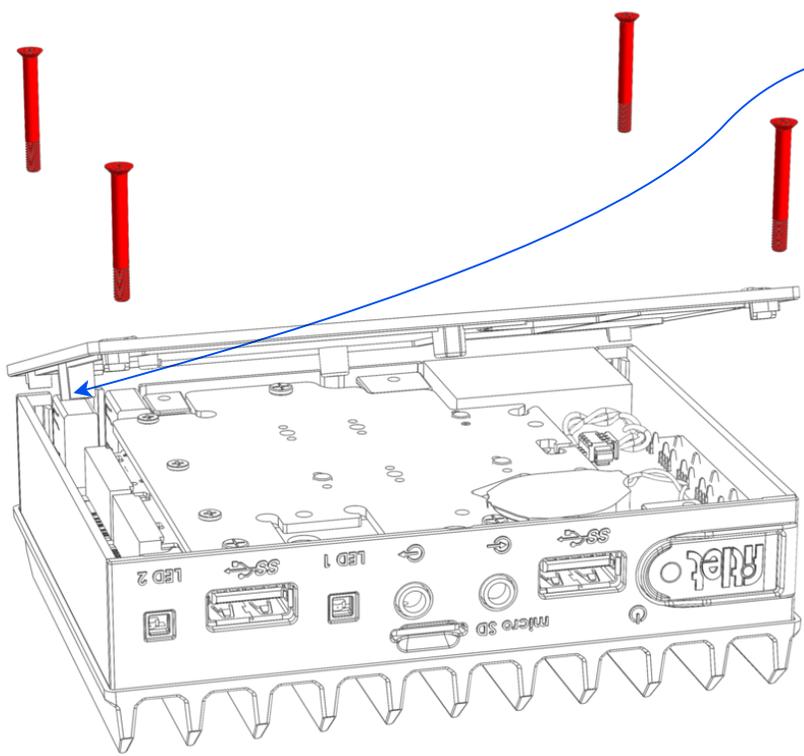

9

Screw the 4x Phillips enclosure screw half way, enough to hold the bottom cover in-place but not too tight

Bring both side panels in place, and hold them

Complete by tightening the Phillips enclosure screws all the way down, while holding the side panels

